

## DS-D4020CS-1F P2.0 640 × 480 Indoor LED



- Module cable-free design for easier installation
- Ultra-thin backshell, excellent flatness
- C13 power connector, global standard
- Ultra-high contrast ratio, excellent color performance
- 4:3 ratio cabinet, best choice for retail scene
- Modular structure design, support module, power supply, receiver card front maintenance

## ▪ Specification


Product Model	
Product Model	DS-D4020CS-1F
Product Type	
Product Type	Indoor small pitch full color LED
Cabinet	
Pixel Configuration	SMD Triad LED
Pixel Pitch	2.0 mm
Pixel Pitch Category	P2.0
Pixel Density	250000 dots/m <sup>2</sup>
Modules Component	2 × 3
Dimensions (W × H × D)	640 (W) mm × 480 (H) mm × 58.6 (D) mm (25.197" × 18.898" × 2.307")
Resolution	320 × 240
Area	0.3072 m <sup>2</sup>
Weight	7.55 kg (16.64 lb)
Cabinet Material	Die cast aluminum
Maintenance Method	Complete front maintenance
Module	
Dimensions	320 mm × 160 mm
Module Resolution	160 × 80
Display	
White Balance Brightness	600 cd/m <sup>2</sup>
Color Temperature	3000 K to 10000 K adjustable
Viewing Angle	160° (H)/160° (V)
Contrast Ratio	5000:1
Color Uniformity	≤ ± 0.003Cx, Cy
Brightness Uniformity	≥ 97%
Processing Performance	
Driving Method	Constant current driving
Frame Frequency	60 Hz
Refresh Rate	3840 Hz
Grey Level	Up to 16 bit
Power	
Max. Consumption	≤ 450 W/m <sup>2</sup>
Average Consumption	≤ 150 W/m <sup>2</sup>
Input Voltage	100 to 240 VAC ± 10%
Working Environment	
Working Temperature	-10 °C to 40 °C (14 °F to 104 °F)
Working Humidity	10% RH to 60% RH (without condensation)
Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
Storage Humidity	10% RH to 85% RH (without condensation)
General	
Package Dimensions (W × H × D)	758 (W) mm × 606 (H) mm × 442 (D) mm (29.843" × 23.858" × 17.402")

Packing List	Qualification Card × 1 Warranty Card × 1 RoHS × 1 Several Joint pieces, Fixing screws and Signal cables
Net Weight	4 cabinets in 1 box: 19.3 kg 24 lamp boards in 1 box: 12.0 kg

▪ **Available Model**

DS-D4020CS-1F

▪ **Dimension**

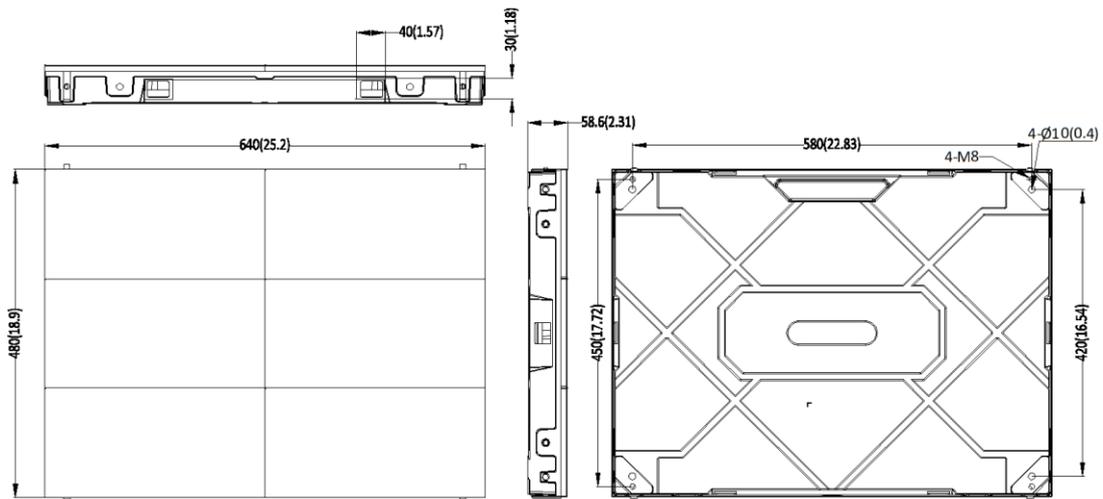

Unit:mm [inch]

SCALE	1:1
-------	-----

▪ **Accessory**

▪ **Optional**

<b>DS-1NP6UEC0</b> CAT6, U/UTP, 24 AWG, CU	<b>DS-D42CS-1F/H</b> CS Spare Hub Board	<b>DS-D42CS-1F/R</b> CS Spare Receiving Card	<b>DS-D42CS-1F/PC</b> CS Spare Power Cable	<b>PW.L188W1.802-PC</b> 640 × 480 Spare PSU
				
<b>DS-D4020CS-1F/M</b> P2.0 Spare Module 				

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
 Hangzhou 310051, China  
 T +86-571-8807-5998  
 www.hikvision.com



Follow us on social media to get the latest product and solution information.

